



WWW.BUCASTORE.COM

Luxury Vinyl Flooring


Product Catalog



SPERTA • 1302



ALLOGA • 1401

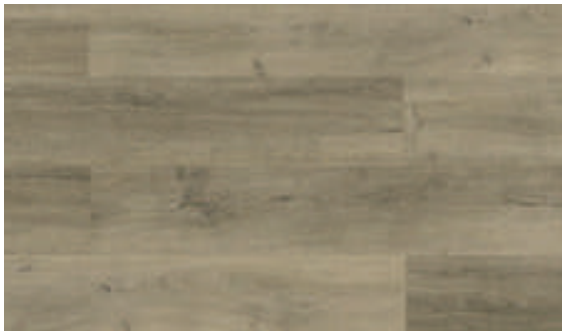

BONEGA • 1304



GRUNDO • 1402



RAPIDA • 1306



PLATANO • 1405



AKRA • 1406



SONGO • 1407



KLARA • 1526



REFLEKTO • 4210



GITARO • 1527




NATURA • 4211



APERTA • 2010



ARBARO • 4212

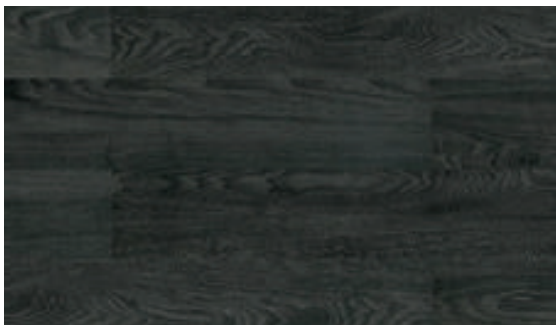

MALLUMO • 4201



AERO • 4213



INVERNO • 8050



PLATANO • 1405



PULITO • 1518



GRANO • 1307



SCURO • 1461




CUSTOM DECORS / TILE FORMATS AVAILABLE

SPECIFICATIONS

FORTIKA

PRIVÉ

	PRODUCT SPECIFICATION	STANDARD	5 mm. 22 MIL SPC Click	7.5 mm. 22 MIL SPC Click
	Total Thickness	ISO 24337	5.00 mm with pad	7.50 mm with pad
	Thickness of Wear Layer		0,55 mm(22 MIL)	0,55 mm(22 MIL)
	Total Weight	EN ISO 23997	7.140 kg/m2	10.710 kg/m2
	Usage Classification	EN 16511	Class 23	Class 23 / Class 34
	Plank Size	ISO 24337	Click : 7"x48"	Click : 9"x60"
	Packaging Per Carton: Planks		Click: 7"x48"- 23.33 SqFT/box -10 pcs.	Click: 9"x60"- 15 SqFT/box - 5 pcs.
	Underlayment optionally IXPE		+ 1.0mm IXPE Underlay	+ 1.5mm IXPE Underlay
	Surface treatment (UV)		Yes	Yes
	Beveled Edges		Yes -Micro Bevel	Yes -Wide Bevel
	Dimensional Stability	EN-ISO 23999	0,15%	0,15%
	Reaction to Fire	EN 13501-1	Class 1	Class 1
	Residual Indentation	ISO 24343-1	0,05 mm	0,05 mm
	Furniture Leg	EN 424	No damage	No damage
	Castor Chair	ISO 4918 - EN 425	No change	No change
	Locking Strength	ISO 24334	Longitudinal joint: 3.4 kN/m, Trans joint 3.6 kN/m	Longitudinal joint: 3.4 kN/m, Trans joint 3.6 kN/m
	Impact Sound Reduction with 1mm IXPE Underlay	EN ISO 717-2	19 dB	21 dB
	Light Fastness	EN ISO 105-B02	6 -7	6 -7
	Resistance to Staining	EN 438-2	Groups 1 - 3: grade 5	Groups 1 - 3: grade 5
	Micro Scratch Resistance	EN 16094	MSR-A2	MSR-A2
	Impact Resistance	EN 13329 Annex F	> 1800 mm	> 1800 mm
	Abrasion Resistance	EN 13329 Annex E	≥ 4000 cycles	≥ 4000 cycles
	Thermal Resistance	EN 12664	0,0177 m2 K/W	0,0177 m2 K/W
	Slip Resistance	DIN 51130 EN 13893	R9 Q 0,30 DS	R9 Q 0,30 DS
	Static Electrical Propensity	EN 1815	2kV	2kV
	Formaldehyde	EN 717-1:2014	E1 (Formaldehyde Free)	E1 (Formaldehyde Free)
	STC Sound Testing	ASTM 492-09	STC 60	STC 60
	IIC Sound Testing	ASTM E 989-18	IIC 66	IIC 62
	Pentachlorophenol (PCP)	CP 491510-01	PCP Free	PCP Free
	Floor Heating System	Yes suitable, see separate installation instructions.	Max. 29° C	Max. 29° C
	FloorScore	Indoor Air Quality Certified to SCS-EC10.3-2014 v4.0	SCS-FS-05915	SCS-FS-05915
	Surface Texture		Standard Emboss	Embossed in Register (EIR)



europine.com



30-YEAR RESIDENTIAL / 7-YEAR COMMERCIAL WARRANTY

sales@europine.com